



Belt fasteners

VAV also supplies the necessary belt fasteners for the assembly of the elevator belts. In various different versions, suitable for all kinds of belts.

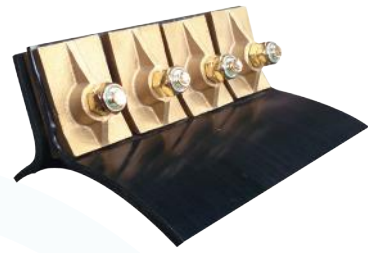

Belt fasteners, Speedy model

3-part belt fastener made of cast iron or bronze, standard width 50 mm, suitable for maximum belt loads of 800 kg/cm. The bronze and stainless steel version are both non-sparking. Stainless steel Speedy's are also suitable for the food industry.

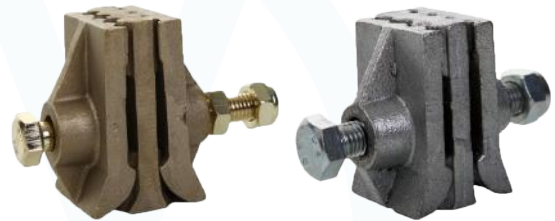


Belt fasteners, Speedy model

Assembly

example of the assembly of 4 belt fasteners for belt widths between 200 and 230 mm.

The distance between the belt fasteners should be between 5 and 10 mm.

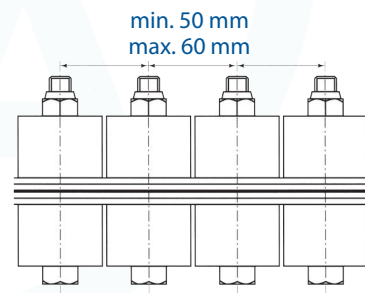

Belt clamps model A + B


Belt clamps offer an alternative to the belt fasteners. They are manufactured to your specifications in mild or stainless steel. 2 models are available.

Model A


For light to average applications.

Model B

Belt clamps with a wedge-shaped adaptor to guide the belt over the pulley in conjunction with more demanding applications.



Model A



Model B

