




Model D plastic

This durable elevator bucket has standard reinforcements on front lip and side walls. This version also has a large volume. The D-type buckets are robust and thus highly suitable for raw materials as well as other industrial applications. Available in HDPE and Nylon.

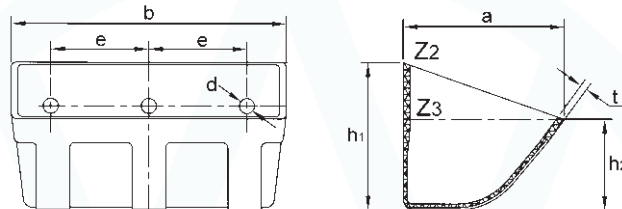

Plastic elevator buckets type D (parameters in mm)										
Type	Size/weight	Size/weight					Volume (L)			Max. bckts/m
		b	a	h1	h2	t	Kg ^{PE}	Z2	Z3	
D	4 x 3	107	81	75	51	5,00	0,078	0,32	0,25	10,0
D	5 x 4	133	113	106	65	6,50	0,165	0,85	0,59	7,0
D	6 x 4	159	108	103	67	6,50	0,185	0,87	0,65	7,2
D	7 x 4	184	108	103	67	6,50	0,205	1,04	0,75	7,2
D	6 x 5	168	140	130	80	6,50	0,320	1,48	1,10	5,7
D	7 x 5	192	140	130	80	6,50	0,355	1,73	1,20	5,7
D	8 x 5	211	140	130	80	6,50	0,385	1,92	1,41	5,7
D	8 x 6	211	168	154	95	7,50	0,530	2,83	2,08	4,9
D	9 x 5	237	140	130	80	7,00	0,475	2,41	1,75	5,7
D	9 x 6	237	168	154	95	7,25	0,560	3,23	2,34	4,9
D	10 x 6	266	168	154	95	7,25	0,588	3,62	2,58	4,9
D	11 x 5	289	140	130	80	7,00	0,540	2,75	2,01	5,7
D	11 x 6	287	168	154	95	7,25	0,645	4,01	2,83	4,9
D	12 x 6	313	168	154	95	7,50	0,760	4,44	3,16	4,9
D	13 x 6	338	168	154	95	7,25	0,735	4,74	3,44	4,9
D	11 x 7	287	197	180	114	8,00	0,935	5,39	3,95	4,2
D	12 x 7	326	197	180	127	8,00	1,010	5,81	4,35	4,2
D	13 x 7	343	197	180	127	8,00	1,130	6,52	5,07	4,2
D	14 x 7	373	197	180	114	8,00	1,110	6,90	5,22	4,2
D	15 x 7	392	197	180	127	9,00	1,305	7,61	6,07	4,2
D	16 x 7	427	197	180	127	9,00	1,230	7,94	6,32	4,2
D	12 x 8	331	222	206	143	10,00	1,445	7,45	5,77	3,6
D	14 x 8	378	222	206	143	10,00	1,550	8,76	6,87	3,6
D	15 x 8	392	222	206	143	10,00	1,555	9,47	7,94	3,6
D	16 x 8	434	222	206	143	10,00	1,740	10,38	8,10	3,6
D	18 x 8	473	222	206	143	10,00	1,895	11,50	9,07	3,6
D	20 x 8	520	225	210	150	10,50	2,230	13,11	10,60	3,6

Z2 = gross volume in liters, Z3 = net volume in liters.

These elevator buckets are without holes, but can be drilled according to customer specifications.