


Model M plastic



This durable elevator bucket has standard reinforcements on front lip and side walls. This version also has a large volume. The M-type buckets have an optimum discharge level and larger capacity. Ideal for agricultural use. Available in HDPE and Nylon.

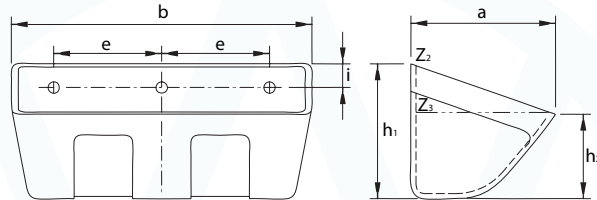

Plastic elevator buckets type M (parameters in mm)

Type	Size/weight						Volume (L)		Max. bckts/m
	b	a	h1	h2	t	Kg ^{-PE}	Z2	Z3	
M4 x 3	105	95	67	45	5	0,080	0,33	0,25	14,00
M5 x 4	138	120	90	52	6	0,160	0,70	0,50	11,00
M7 x 5	186	150	110	85	6	0,290	1,75	1,35	8,60
M8 x 5	215	155	110	80	6	0,310	1,98	1,58	8,60
M9 x 6	250	168	132	93	7	0,500	3,00	2,30	7,40
M11 x 5	285	150	110	85	7	0,440	2,60	2,20	8,60
M11 x 6	290	168	132	100	7	0,630	3,50	2,70	7,40
M12 x 8	315	225	168	125	8	1,000	6,50	5,00	5,88
M13 x 8	340	225	168	125	8	1,050	7,10	5,40	5,88
M15 x 8	384	225	168	125	9	1,310	8,10	6,20	5,88
M18 x 8	458	225	168	125	9	1,495	9,80	7,50	5,88
M20 x 8	519	225	168	125	9	1,785	10,76	8,60	5,88

Z2 = gross volume in liters, Z3 = net volume in liters.

These elevator buckets are without holes, but can be drilled according to customer specifications.